

APP CRS <b>302°</b>	Rwy Idg <b>5300</b>
	TDZE <b>408</b>
	Apt Elev <b>413</b>


# RNAV (GPS) RWY 30R

ST LOUIS DOWNTOWN (CPS)


**▼** Circling Rwy 5 NA at night. DME/DME RNP-0.3 NA. Rwy 30R helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDA 80 feet, increase LNAV Cats C/D visibility 3/8 SM and Circling Cat C visibility 1/4 SM.

**▲** MISSED APPROACH: Climbing left turn to 3000 direct GLASS and hold.

ATIS <b>121.45</b>	ST LOUIS APP CON <b>123.7 371.875</b>	DOWNTOWN TOWER * <b>119.925 (CTAF) 0 379.3</b>	GND CON <b>121.8</b>	CLNC DEL <b>118.275</b>	CLNC DEL <b>121.8</b> (When twr closed)	UNICOM <b>122.95</b>
-----------------------	--	---	-------------------------	----------------------------	---	-------------------------

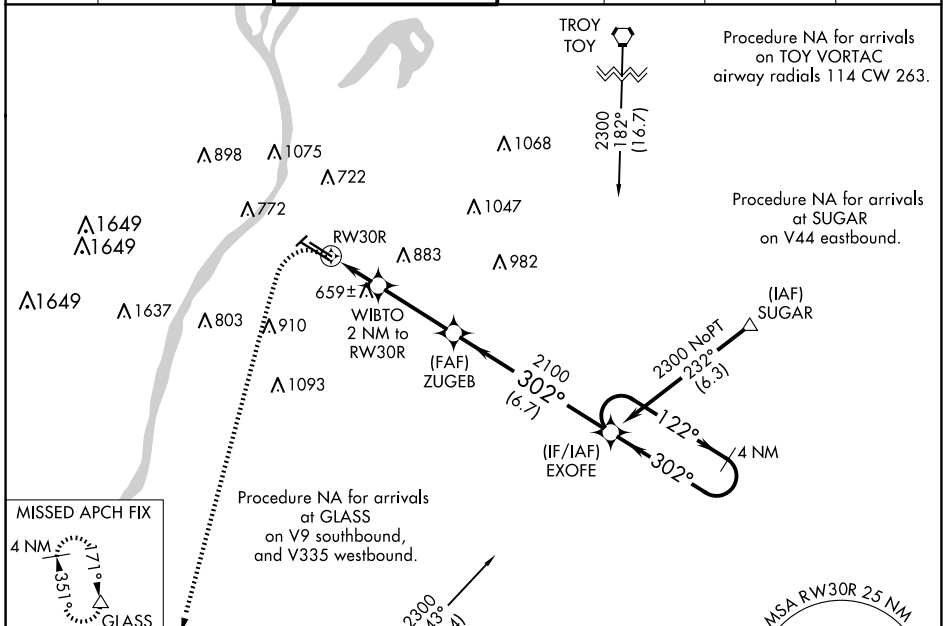

ELEV 413	<b>D</b>	TDZE 408
----------	----------	----------

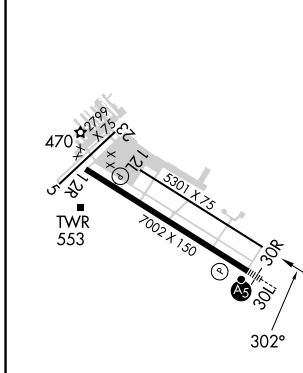

HIRL Rwy 12R-30L REIL Rwys 12L and 12R REIL Rwy 30R MIRL Rwys 5-23 and 12L-30R	CATEGORY	A	B	C	D
	LNAV MDA	920-1	512 (600-1)	920-1 3/8	512 (600-1 3/8)
	CIRCLING	920-1 507 (600-1)	1120-1 707 (800-1)	1240-2 1/2 827 (900-2 1/2)	1380-3 967 (1000-3)

EC-3, 15 MAY 2025 to 12 JUN 2025

EC-3, 15 MAY 2025 to 12 JUN 2025