

WAAS CH 82501 W17A	APP CRS 168°	Rwy Idg 8002 TDZE 24 Apt Elev 24
---------------------------------	------------------------	---

RNAV (GPS) RWY 17

ACADIANA RGNL (ARA)


∇ Circling NA to Rws 17W and 35W. Inop table does not apply to LPV.
For inop ALS, increase LNAV/VNAV all Cats visibility to 1¼ SM and LNAV Cats C/D visibility to 1 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

ODALS



MISSED APPROACH:
Climb to 440 then climbing left turn to 2000 direct CLYNT and hold.

ASOS 133.325	LAFAYETTE APP CON* 121.1 268.7	ACADIANA TOWER* 125.0 (CTAF) 0 239.3	GND CON 121.7	CLNC DEL 121.7 118.05 (when twr closed)	UNICOM 122.95	0* 122.7
------------------------	--	--	-------------------------	---	-------------------------	---------------------------

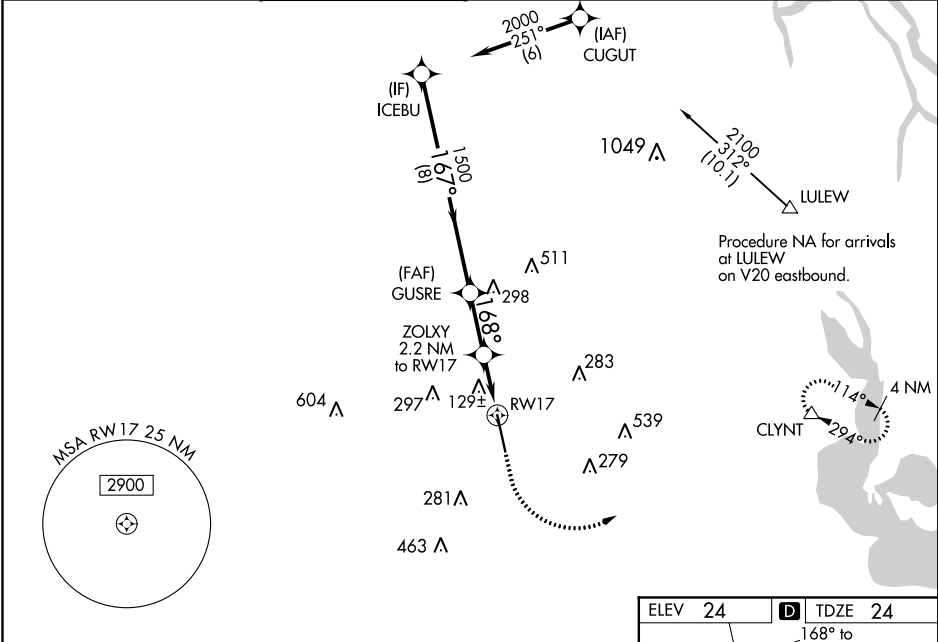

SC-4, 21 JUN 2018 to 19 JUL 2018

SC-4, 21 JUN 2018 to 19 JUL 2018

	ELEV 24	D TDZE 24		
	ICEBU	GUSRE	ZOLXY 2.2 NM to RWY 17	RWY 17
	2000	1500	1500	2000
	GP 3.00° TCH 51	167°	168°	168° to RWY 17
	8 NM	2.3 NM	1.2 NM	1 NM
				*NNAV only.
CATEGORY	A	B	C	D
LPV DA		274-¾	250 (300-¾)	
LNAV/VNAV DA		420-1½	396 (400-1½)	
LNAV MDA	380-¾	356 (400-¾)	380-7/8	356 (400-7/8)
C CIRCLING	440-1 416 (500-1)	480-1 456 (500-1)	600-1½ 576 (600-1½)	680-2 656 (700-2)

