


APP CRS	Rwy Idg	10000
267°	TDZE	86
	Apt Elev	96

RNAV (RNP) Y RWY 27



GEORGE BUSH INTCNL/HOUSTON (IAH)

RNP AR APCH - GPS.		ALSf-2	MISSED APPROACH: Climb to 560 then climbing left turn to 3000 direct TICOY and hold.
Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -2°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 4500.			

D-ATIS	HOUSTON APP CON	HOUSTON TOWER	GND CON	CLNC DEL	CPDLC
124.05	120.05 379.1 EAST 124.35 316.15 WEST	135.15 290.2	118.575	128.1	

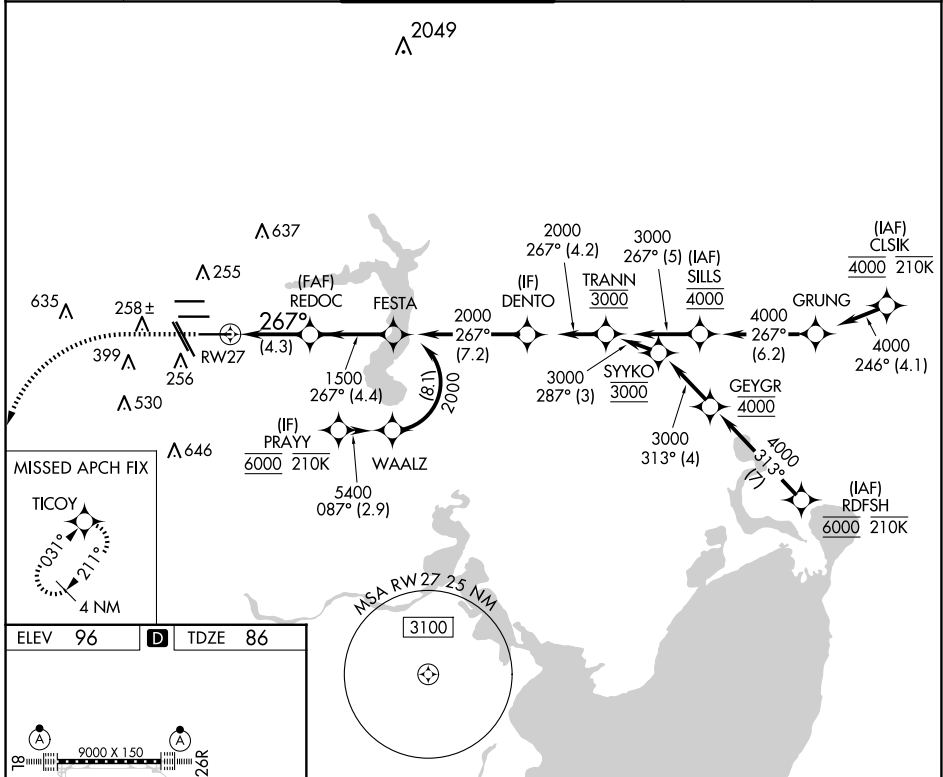

ELEV	96	TDZE	86
------	-----------	------	-----------

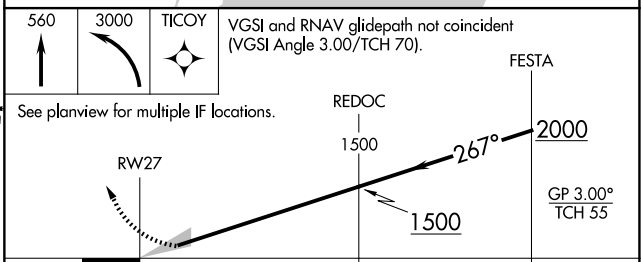

TDZ/CL Rwy	8L, 8R, 15R, 26R, 26L, 27 and 33L			
HIRL	all Rwy			
CATEGORY	A	B	C	D
RNP	0.30 DA	380/24	294 (300-1/2)	

AUTHORIZATION REQUIRED

SC-5, 07 AUG 2025 to 04 SEP 2025

SC-5, 07 AUG 2025 to 04 SEP 2025