ILS or LOC RWY 34

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)

LOC I-ROA	APP CRS	Rwy Idg / TDZE / Apt Elev
109.7	336°	5810 / 1160 / 1175

DME required for procedure entry. ADF or RADAR required.

For inop ALS, increase S-ILS 34 # all Cats visibility to 1⅜ SM. Circling NA northwest of Rwy 6-24. -13°C Inop table does not apply to S-ILS 34 all Cats.

MALSR

MISSED APPROACH: Climb to 2300 then climbing left turn to 4500 direct VIT NDB and hold. Continue climb-in-hold to 4500. # Missed approach requires minimum climb of 425 feet perNM to 3700.

ATIS	ROANOKE APP CON	ROANOKE TOWER	GND CON	CLNC DEL
132.375	126.9 339.8	118.3 257.8	121.9 257.8	119.7

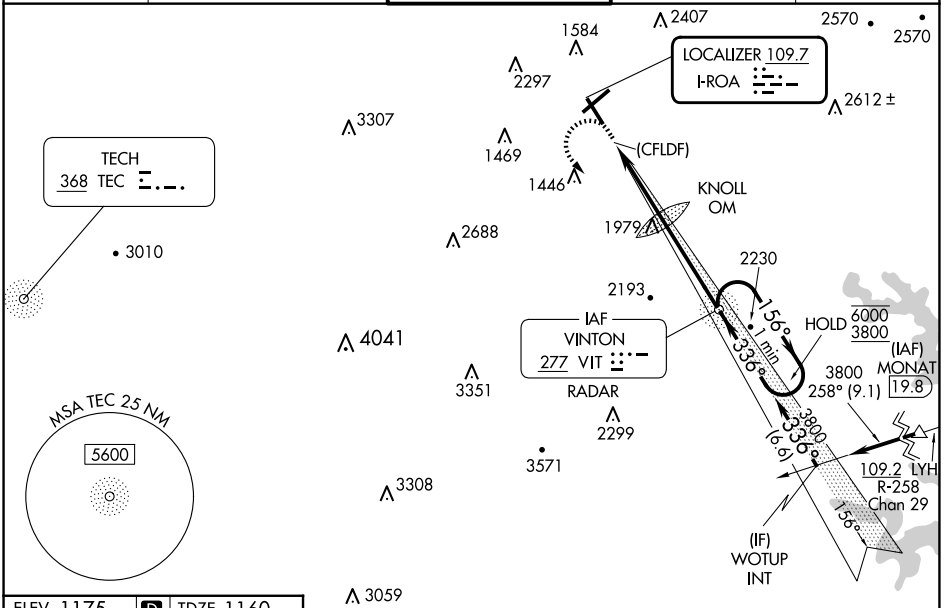

Procedure NA for arrivals at MONAT on V470 northeast bound.

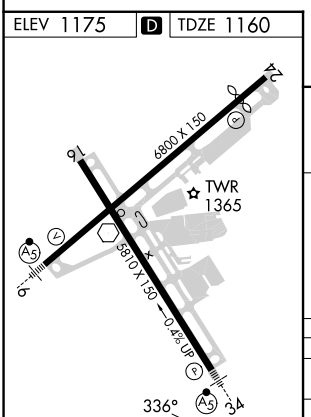

FAF to MAP 7.1 NM

Knots	60	90	120	150	180
Min:Sec	7:06	4:44	3:33	2:50	2:22

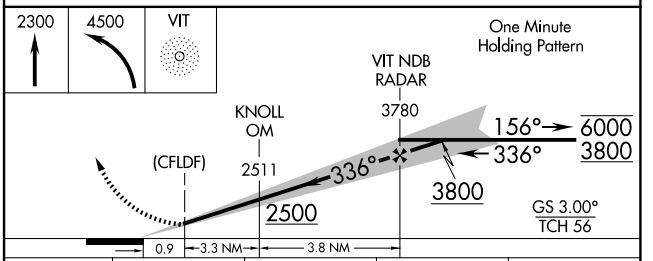

CATEGORY	A	B	C	D
S-ILS 34 #	1603-⅞	443 (500-⅞)		
S-ILS 34	2040-4	880 (900-4)		
S-LOC 34	2140-¾ 980 (1000-¾)	2140-1 980 (1000-1)	2140-2½	980 (1000-2½)
CIRCLING	2140-1¼ 965 (1000-1¼)	2140-1½ 965 (1000-1½)	2460-3 1285 (1300-3)	2800-3 1625 (1700-3)

NE-3, 15 MAY 2025 to 12 JUN 2025
NE-3, 15 MAY 2025 to 12 JUN 2025