

WAAS CH 77500 W18A	APP CRS 183°	Rwy Idg TDZE 748 Apt Elev 748	8676
--	------------------------	---	-------------

RNAV (GPS) Y RWY 18L


CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.

- ⚠ Circling NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.
- ⚠ Rwy 18L helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C.


MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 direct LOCAS and hold.

D-ATIS ARR 121.15 DEP 132.1	CHARLOTTE APP CON (001°-119°) 128.32 (120°-295°) 120.05 (296°-360°) 134.75 (180°-359°) 257.2 (360°-179°) 307.8	CHARLOTTE TOWER (Rwys 18L-36R) 118.1 257.8 (Rwy 18C-36C) 126.4 257.8 (Rwy 18R-36L) 133.35 257.8	GND CON 121.8 348.6 (WEST) 121.9 348.6 (EAST)	CLNC DEL 127.15 348.6
---	--	---	---	---

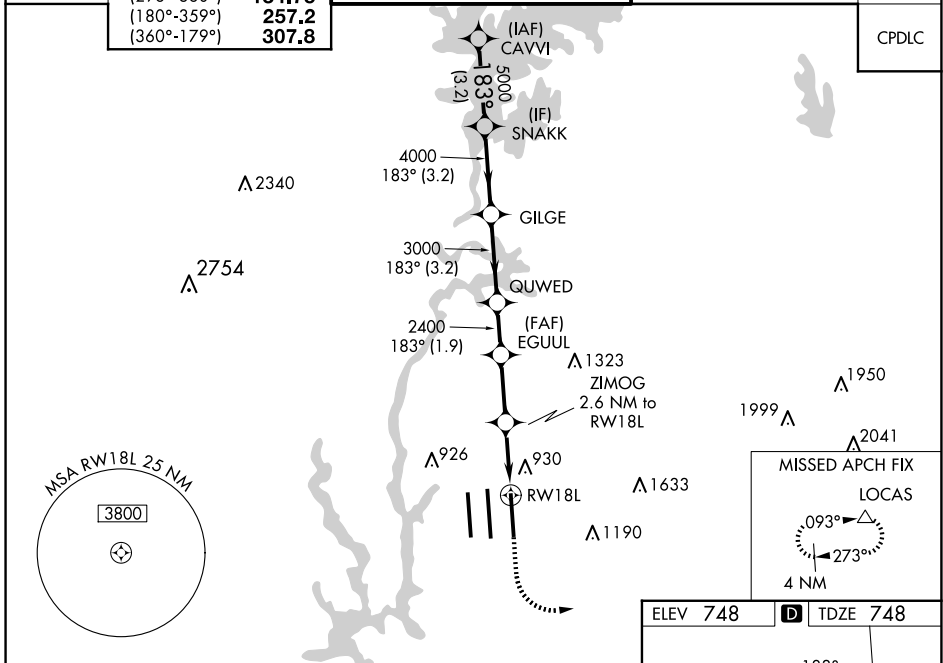

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 76).

CAVVI	SNAKK	GILGE	QUWED	EGUUL	ZIMOG	LOCAS	
6000	5000	4000	3000	2400	1620	1300 / 4000	
GP 3.00° TCH 56							
	3.2 NM	3.2 NM	3.2 NM	1.9 NM	2.4 NM	1.5 NM	
CATEGORY	A		B		C		D
LPV DA	1002/40		254 (300-¾)				
LNAV/VNAV DA	1216-1⅜		468 (500-1⅝)				
LNAV MDA	1180/55		432 (500-1)		1180-1¼		432 (500-1¼)
CIRCLING	1380-1		632 (700-1)		1500-2¼		1500-2½
					752 (800-2¼)		752 (800-2½)

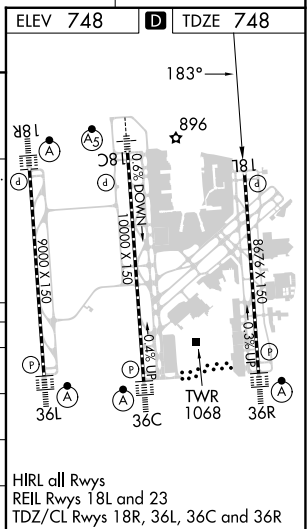

SE-2, 15 MAY 2025 to 12 JUN 2025

SE-2, 15 MAY 2025 to 12 JUN 2025