WAAS CH 90407 W26B	APP CRS 258°	Rwy Idg 10200 TDZE 926 Apt Elev 944

RNAV (GPS) Y RWY 26L

ONTARIO INTL (ONT)

RNP APCH - GPS.

T Circling NA north of Rwy 8L-26R. For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C. For inop ALS, increase all Cats LNAV/VNAV visibility to RVR 5500.

ALSF-2

MISSED APPROACH: Climb to 4700 direct HERZO and on track 170° to MAHOY and on track 083° to PDZ VORTAC, continue climb in hold to 4700.

D-ATIS	SOCAL APP CON	ONTARIO TOWER	GND CON	CLNC DEL	CPDLC
124.25	127.0 318.2	120.6 360.775	121.9 257.8	132.9	

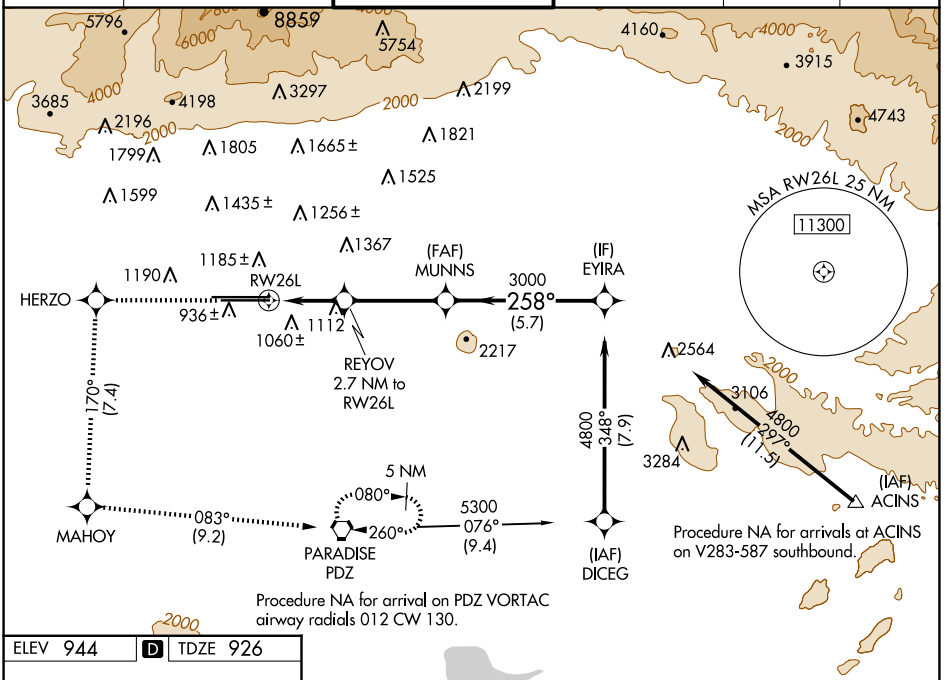

ELEV 944 D TDZE 926



TDZ/CL Rwys 8L, 26L and 26LR
HIRL Rwys 8L-26R and 8R-26L

4700	HERZO	tr 170°	MAHOY	tr 083°	PDZ

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).

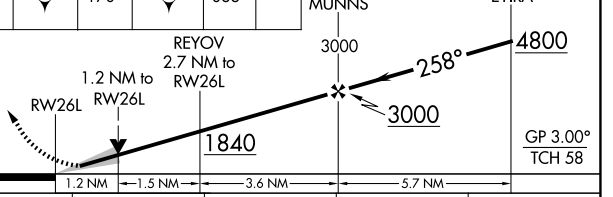

CATEGORY	A	B	C	D
LPV DA	1126/18 200 (200-½)			
LNAV/VNAV DA	1267/30 341 (400-⅝)			
LNAV MDA	1380/24 454 (500-½)		1380/45 454 (500-⅞)	
C CIRCLING	1400-1 456 (500-1)		1500-1½ 556 (600-1½)	1540-2 596 (600-2)

SW-3, 15 MAY 2025 to 12 JUN 2025